

Titan Series Basket Stretchers

- * Available in Stainless Steel & Titanium
- * Custom Powder Coating available in Hi-Viz Yellow, Black & Coyote Brown. Ask your RSM for more details and pricing.

MAIN FEATURES

- StratLoad™ Feature as Standard
- Regular Design – Allows any backboard
- Tapered Design – Allows easier access in confined areas
- 32" Design – Wider basket for bariatric patients
- 25 mm Top Tube – large top tube is very easy to hold onto, especially in long carries
- High Density Polyethylene (HDPE) netting – attached with shock cord so they will give way when loads are improperly placed & it will not rust
- UHMW-PE Back Support – No more splinters from a wooden back support, and it is extremely durable
- Titanium material is extremely light weight

SPLIT-APART FEATURES

The unique patented Loc-Safe feature allows for a completely solid connection between the two parts of the stretcher, without the use of pins or tubes sliding into each other. It also allows for a quick and easy visual check to ensure connections are secure throughout an operation. This system of connection allows the stretcher to be assembled or disassembled in about 15 seconds.


DESIGN

The Titan and Titan-Ti Series Basket Stretchers are all TIG welded frame construction. (Both stainless steel and titanium) It relies on its frame geometry, construction methods and materials for its ultimate strength.

The Titan and Titan-Ti Series Basket Stretchers are designed to meet a Traverse-Standard of 1,134 kg (2500 lbs.) while suspended from a four-point litter bridle. All testing has been completed at an independent facility, and are proven to surpass this specification.

The Titan and Titan-Ti Series Basket Stretchers are specifically designed to perform in a technical rescue environment. The materials allow it to survive in the most extreme conditions, while the design itself allows for a user-friendly platform from which to work. The titanium materials allow an additional feature of reducing more than half of the weight when compared to similar stainless steel models.

Unique features include a 25.4mm (1 inch) top-tube to make it easy to hold onto relative to smaller-tube frames. Four StratLoad™ attachment points make it quick, easy and safer to clip your carabiner to your Litter Bridle. These attachment points protect the carabiner from wall and rock faces. The High Density Polyethylene (HDPE) netting allows

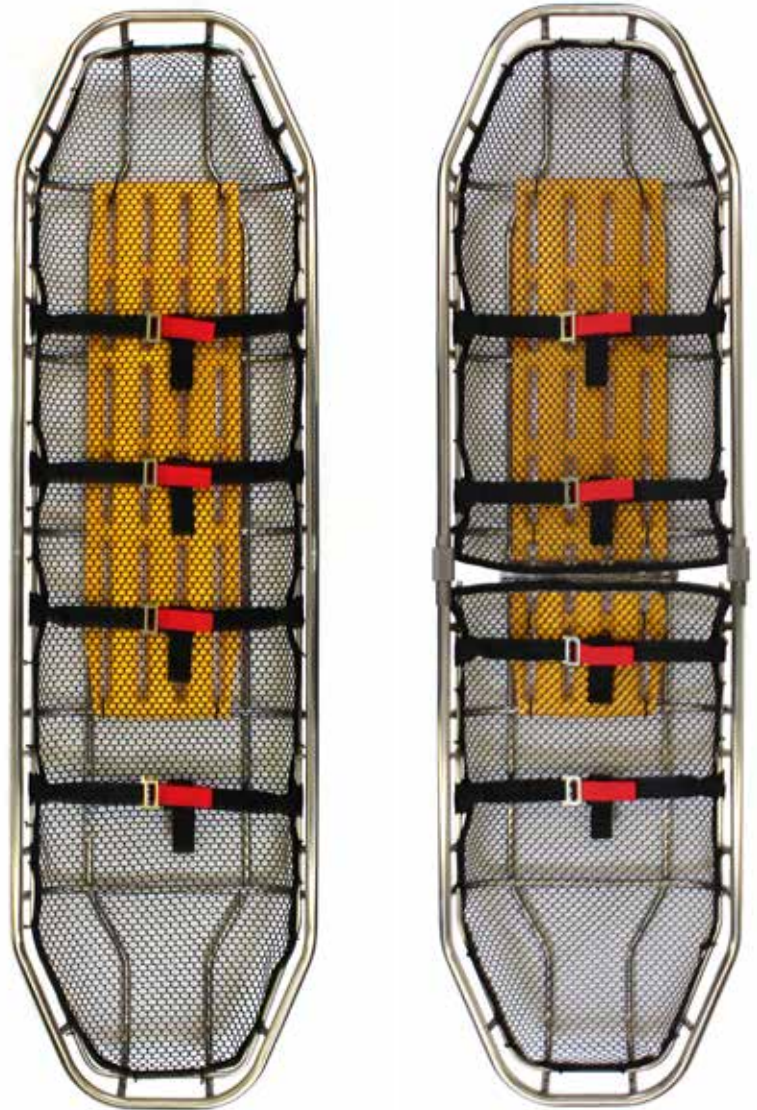

REGULAR STAINLESS STEEL
REGULAR TITANIUM

SPLIT REGULAR STAINLESS STEEL
SPLIT REGULAR TITANIUM



COLLET PROTECTORS



STRATLOAD™ ATTACHMENT

water and air to easily pass through the patient compartment, yet the small holes keep from snagging debris. The High Density Polyethylene (HDPE) material will not rust and potentially cause additional harm to your patient. They are attached with shock cord so they will give-way when loads are improperly placed on it.

Every Split-Apart basket includes Collet Protectors. These protectors are meant to be used on each end when the stretcher is not in use. They protect the threads from damage and keep debris out during storage and transport.



TAPERED STAINLESS STEEL
TAPERED TITANIUM



SPLIT TAPERED STAINLESS STEEL
SPLIT TAPERED TITANIUM



32" (WIDE) STAINLESS STEEL ONLY

TITANIUM CERTIFICATION



STAINLESS STEEL CERTIFICATION

UL Classification NFPA 1983-2012 Ed.



Titan 32" is not UL Classified

PART No.	DESCRIPTION	WIDTH	LENGTH	LENGTH SPLIT	DEPTH	DEPTH SPLIT	WEIGHT	LOAD RATING
11-0101A	Titan Regular SS	58 cm/23 in	212 cm/83.5 in	--	18 cm/7 in	--	13.6 kg/30 lbs	1136 kg/2500 lbs
11-0100A	Titan Tapered SS	58 cm/23 in	212 cm/83.5 in	--	18 cm/7 in	--	13.6 kg/30 lbs	1136 kg/2500 lbs
11-0102A	Titan 32" SS	81 cm/32 in	212 cm/83.5 in	--	18 cm/7 in	--	19 kg/42 lbs	1136 kg/2500 lbs
11-0103A	Titan Split Regular SS	60 cm/23.5 in	212 cm/83.5 in	115.6 cm/45.5 in	19 cm/7.5 in	24.75 cm/9.75 in	15 kg/33 lbs	1136 kg/2500 lbs
11-0104A	Titan Split Tapered SS	60 cm/23.5 in	212 cm/83.5 in	115.6 cm/45.5 in	19 cm/7.5 in	24.75 cm/9.75 in	15 kg/33 lbs	1136 kg/2500 lbs
11-0116SL	Titan Regular Ti	58 cm/23 in	212 cm/83.5 in	--	18 cm/7 in	--	6.5 kg/14.25 lbs	1136 kg/2500 lbs
11-0118SL	Titan Tapered Ti	58 cm/23 in	212 cm/83.5 in	--	18 cm/7 in	--	6.5 kg/14.25 lbs	1136 kg/2500 lbs
11-0115SL	Titan Split Regular Ti	60 cm/23.5 in	212 cm/83.5 in	115.6 cm/45.5 in	19 cm/7.5 in	24.75 cm/9.75 in	7.5 kg/16.5 lbs	1136 kg/2500 lbs
11-0119SL	Titan Split Tapered Ti	60 cm/23 in	212 cm/83.5 in	115.6 cm/45.5 in	19 cm/7.5 in	24.75 cm/9.75 in	7.5 kg/16.5 lbs	1136 kg/2500 lbs